

CYCLONING / DEWATERING UNIT

SR RANGE

SAND WASHING



Le sable, l'eau,
pour mieux construire demain



FIELDS OF APPLICATION

- > Gravel and concrete sand industries
- > Desanding of effluent / slurry
- > Treatment of polluted soils



PERFORMANCE AND COMPETITIVENESS


- > A complete range of 6 units for capacities from 50 to 250 t/h of washed sand
- > MS performance : reduced delivery time, optimised investment
- > Turnkey solution for an optimal integration in different process



SERVICES

At every stage of the project, whether upstream with the sales manager or downstream with the project engineer, MS delegates a competent contact to support you:
Our commitment is based on listening, guaranteeing progress and coordinating the associated departments.




IN DETAIL

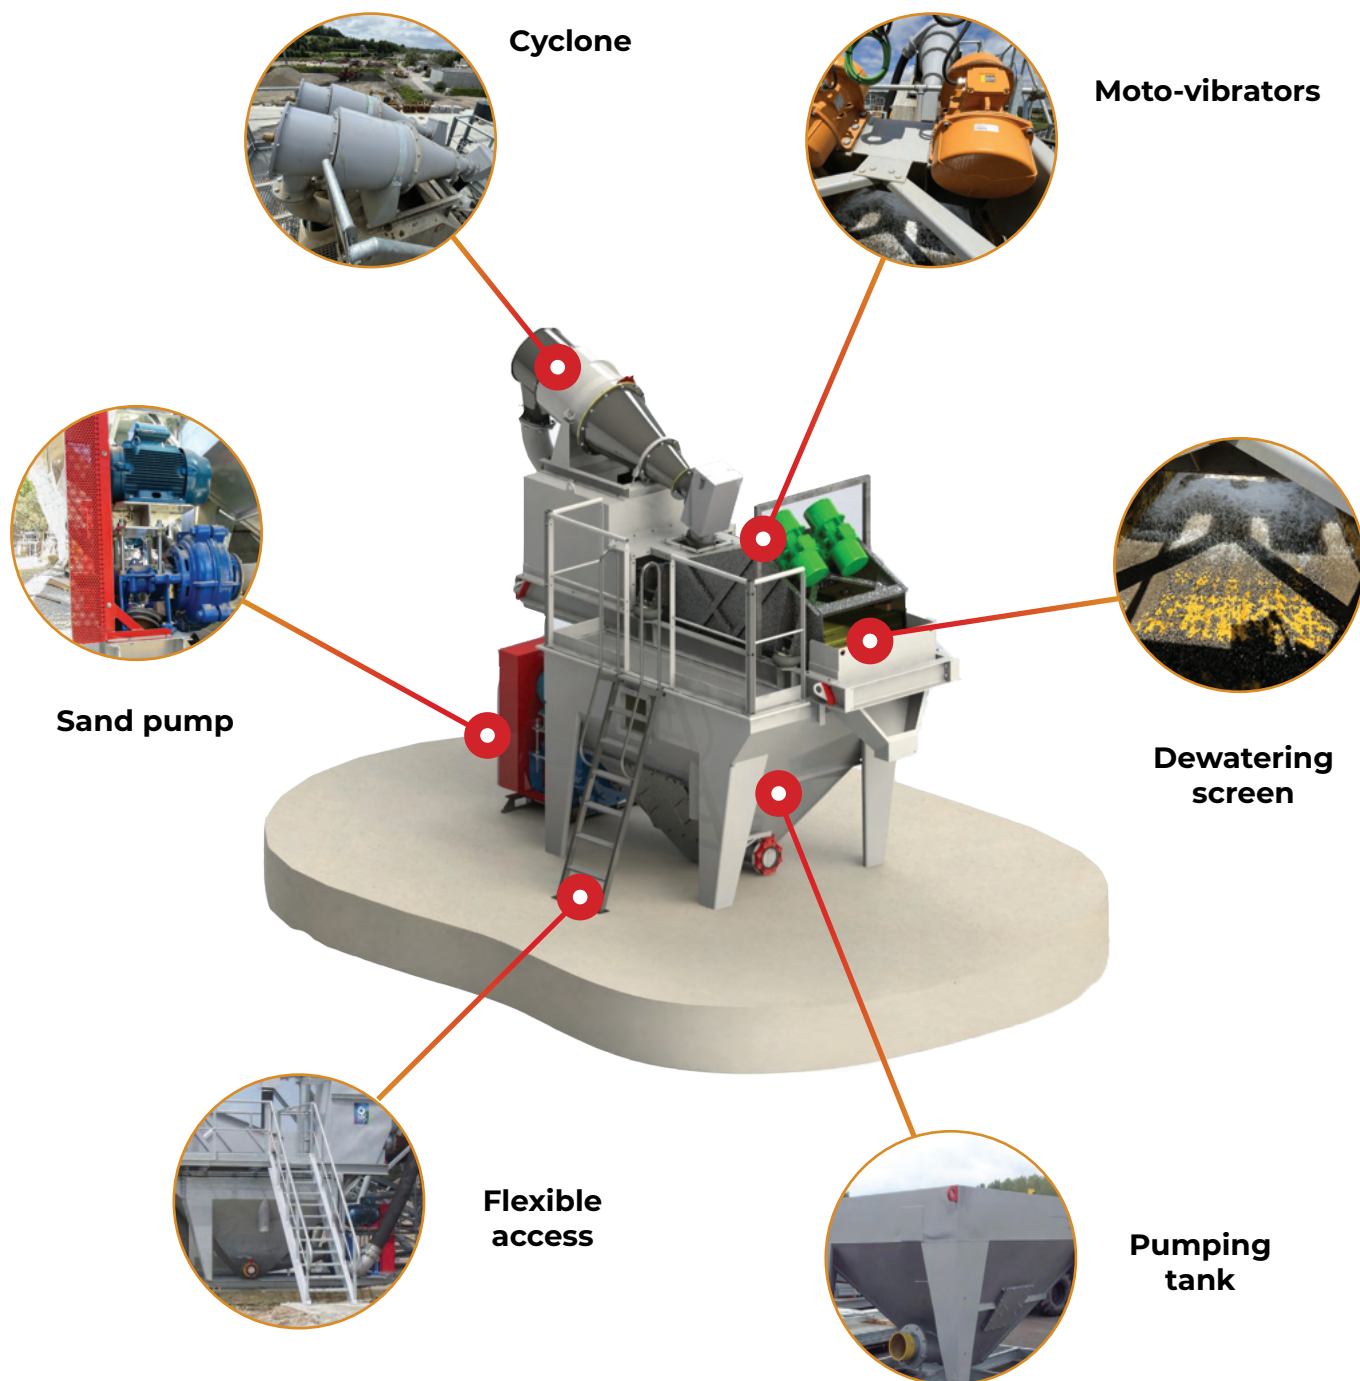

SECURITY

Safety is a daily priority for MS, and is paramount at every stage (research/study/design/organisation/assembly) and throughout its solutions life cycles. This risk prevention policy is centralised around our teams, partners and customers.

Type of unit	Capacity (0-4 mm dewatered sand)	Pump	Cyclone	Dewaterer
MS 160x50 SR	50 t/h	HR 150	Ø 440 +	ES 6 x 19 6P
MS 260x80 SR	80 t/h	HR 50	Ø 560 +	ES 8 x 20 6P
MS 380x130 SR	130 t/h	WGR 150	Ø 650 +	ES 10 x 24 6P
MS 480x150 SR	150 t/h	WGR 200	Ø 750 +	ES 12 x 27 6P
MS 620x200 SR	200 t/h	WGR 200	Ø 2 x 650	ES 15 x 30 6P
MS 800x250 SR	250 t/h	HR 250	Ø 2 x 650 +	ES 18 x 33 6P

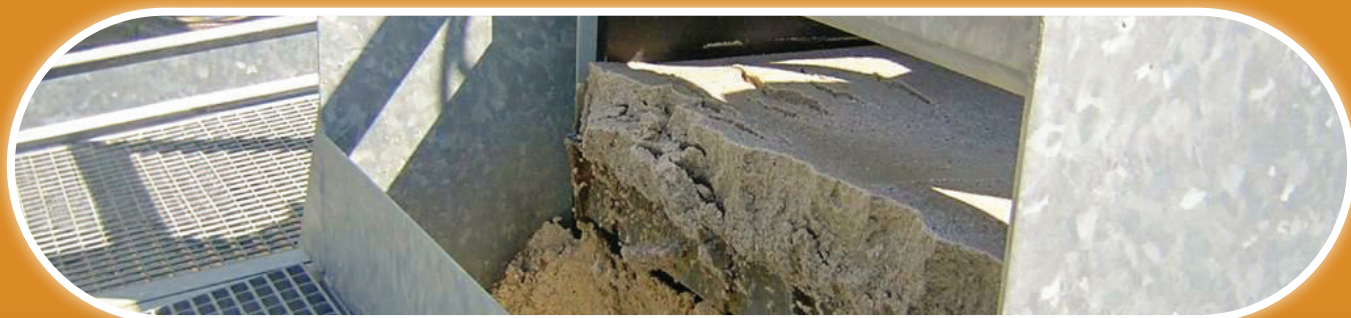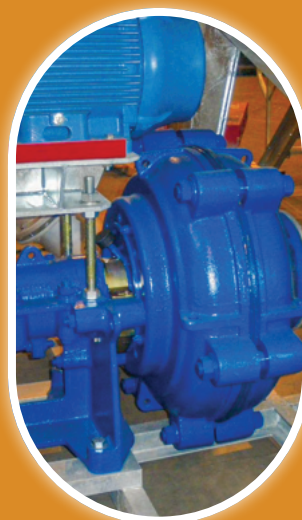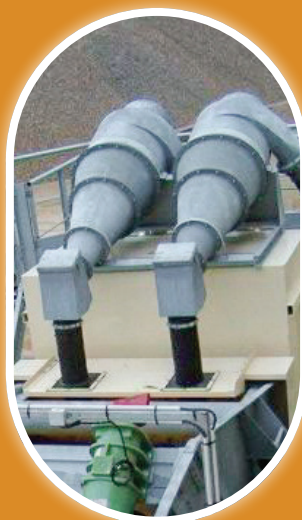

CONTACT US !

2 rue Pierre-Gilles de Gennes
Pra de Serre
63960 - Veyre-Monton
France

FIND US ON
SOCIAL MEDIA



+ 33 4 73 28 52 70

info@m-s.fr

www.m-s.fr

